


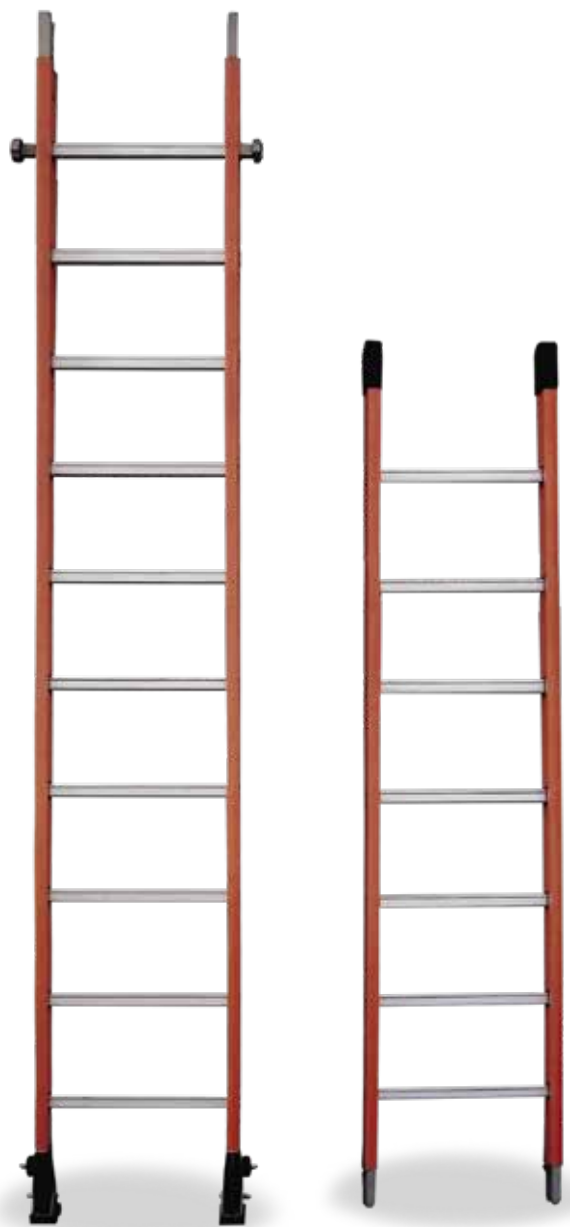

Possibility to compose the product with desired elements


Description

The ladder is made with fiberglass frames and aluminum steps.
The total height of the ladder is 10,4 m and it is composed of 4 items, divided as follows:
1 Bottom element
2 Interchangeable middle elements
1 Final element
The ladder has two feet as our VF ladder
or, on request, it can be equipped with two anti-slip rubber feet.
N.B. Safety sleeve is compulsory over 8 m (according to D. Lgs. n° 81/2008)

STEPS: WELD FREE AND RIVETING FREE


Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
STEPS: aluminum 35x24 mm
FRAMES: fiberglass 88x32 mm
FEET: articulated in rubber and stainless steel
SCREWS/BOLTS: stainless steel
JOINTS AND FIXING HANDWHEEL: die-casted aluminum
WORKING HEIGHT: 10,40 m
CORRECT INCLINATION: 20°
TOTAL WEIGHT: 48 kg
SAFETY STANDARD: D. Lgs n. 81/2008

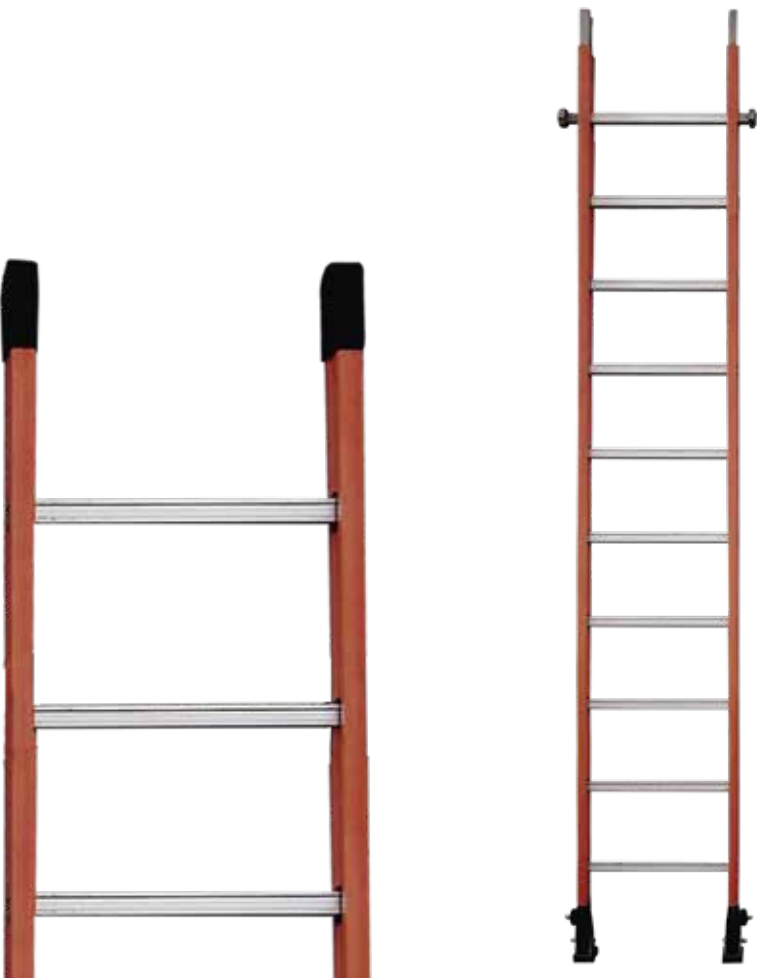


Code	Description	Elements	Steps	Total Height	Footing Width	Top Width	Weight
S4010PV	Bottom section middle element	3	10	3155	470	405	12 kg
S4007FV	Final element	1	7	2200	470	425	8 kg

The overlap between an element and another measures 430 mm
Measures are in mm

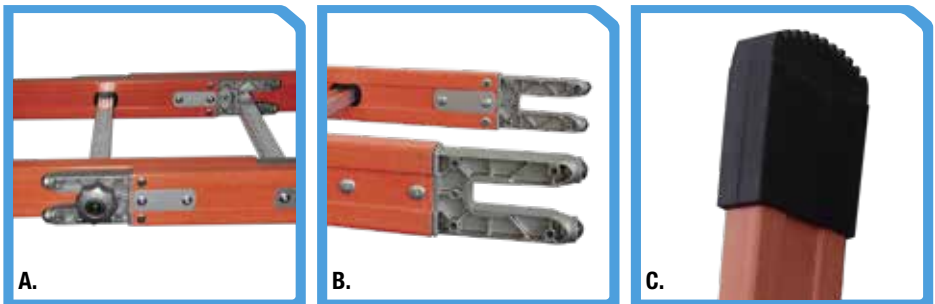

A. Handwheel detail and grafting elements
B. Graft
C. Anti-slip cap

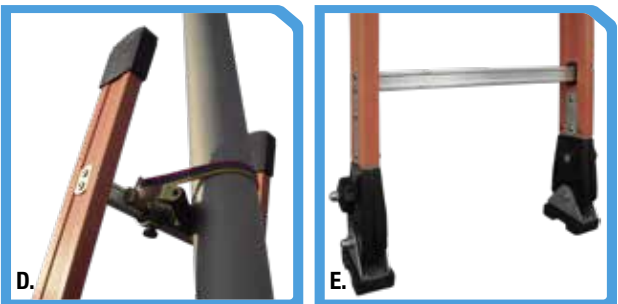

D. Pole rest detail
E. Feet detail