



Description

The ladder is made with aluminum frames and aluminum anti-slip steps. On request, the ladder can be supplied with two hooks to fix the ladder on any furniture, wall or shelf. The ladder is equipped with a guard rail for safety of the operator. It is light, practical, durable and it is suitable for intensive use.

STEPS: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data


WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

STEPS: aluminum 95x23 mm


FRAMES: anodized aluminum 65x30 mm

TOP WIDTH: 350 mm

SAFETY STANDARD:
UNI EN 131-2



A. Anti-torsion supports
B. Foot detail
C. Iron hooks

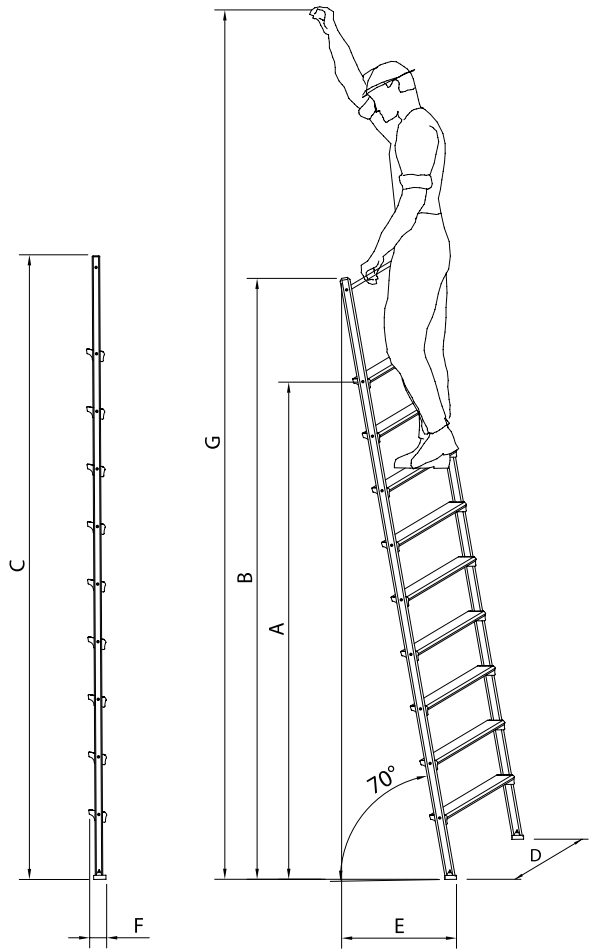

Code	Steps	A	B	C	D	E	F	G	Weight
S0809P	9	2430	2870	3030	600	1160	120	4280	11,2 kg
S0811P	11	2970	3360	3530	640	1360	120	4820	13,2 kg
S0812P	12	3240	3850	4030	660	1490	120	5090	14,8 kg
S0814P	14	3750	4300	4530	700	1670	120	5600	17,2 kg
S0816P	16	4280	4770	5030	740	1860	120	6130	19,4 kg
S0818P	18	4860	5280	5530	780	2000	120	6710	21,8 kg
S0819P	19	5100	5720	6030	800	2180	120	6950	23,4 kg
S0515	Anodized aluminum rail ø 30 mm								0,60kg/m

Measures are in mm