



Description

The ladder has two climb ramps and it is very solid. It has anodized aluminum frames and anti-slip steps. It is practical and durable and it provides to operator an excellent comfort.

STEPS: they are mounted on aluminum die-casted supports with rungs and antitorsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

STEPS: aluminum 95x23 mm




FRAMES: anodized aluminum
42x22 mm

HINGE JOINT: stainless steel


TOP WIDTH: 350 mm

SAFETY STANDARD:

D. Lgs. n° 81/2008



- A. Particular of platform
- B. Anti-opening hinge joint
- C. Particular of steps

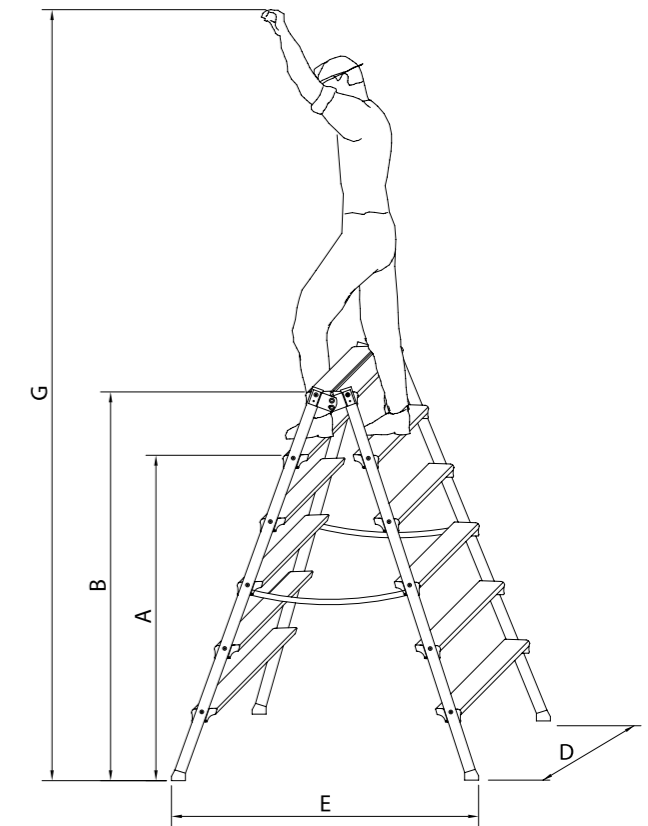

Code	Steps	A	B	C	D	E	F	G	Weight
S1902	2+2	260	520	550	450	580	200	2010	5,2 kg
S1903	3+3	500	750	800	475	750	200	2250	6,1 kg
S1904	4+4	730	990	1050	500	920	200	2480	7 kg
S1905	5+5	970	1220	1300	525	1090	200	2720	7,9 kg
S1906	6+6	1200	1460	1550	550	1260	200	2950	8,8 kg
S1907	7+7	1430	1690	1800	575	1430	200	3180	9,7 kg
S1908	8+8	1670	1930	2050	600	1600	200	3420	10,6 kg
S1909	9+9	1900	2160	2300	625	1770	200	3650	11,5 kg
S1910	10+10	2140	2400	2550	650	1940	200	3890	12,4 kg
S1911	11+11	2370	2630	2800	675	2210	200	4120	13,3 kg
S1912	12+12	2610	2870	3050	700	2280	200	4360	14,2 kg

Measures are in mm