




To optimize transport the ladder can be supplied disassembled

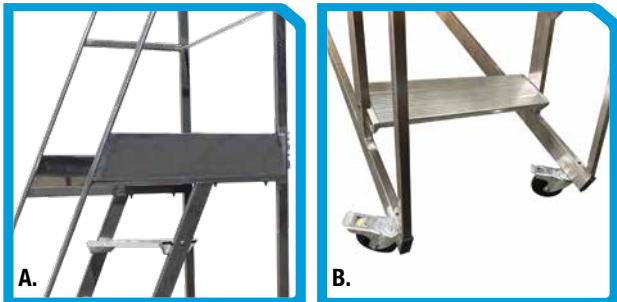

Decription

The ladder is made of stainless steel and it is equipped with handrail. Platform and steps are in anti-slip aluminum.

It is available in two versions:

- **S1P/A** (from 4 to 13 steps) four rotating wheels with brake lever.
- **S1P/F** (from 4 to 13 steps) four ground fixing plates

WARNING: with version S1P/A the user must activate the brake pedal before using the ladder.

Steps: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

FRAMES: stainless steel
(40x20, 60x20, 20x20 mm)

PLATFORM: anti-slip aluminum 700x340 mm


WHEELS: rotating wheels with brake lever Ø 125mm

STEPS: aluminum 150x23 mm

TOP WIDTH: 700 mm

SAFETY STANDARD: D. Lgs. n° 81/2008

A. Platform
B. Rotating wheels with brake lever

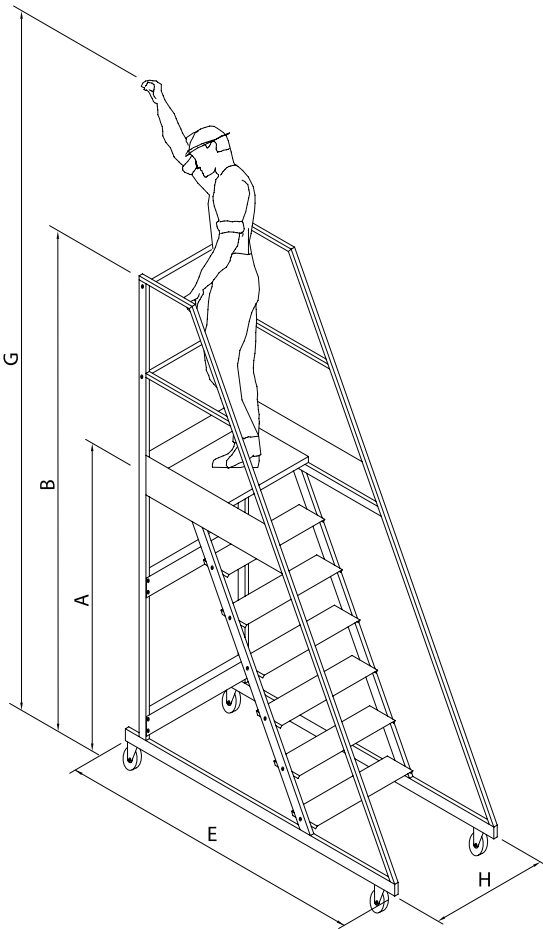

Code	Steps*	A	B	E	G	H	Weight
S2604A	4	1000	2000	1320	2850	700	18 kg
S2605A	5	1250	2250	1435	3100	700	23 kg
S2606A	6	1500	2500	1550	3350	700	28 kg
S2607A	7	1750	2750	1665	3600	700	33 kg
S2608A	8	2000	3000	1780	3850	700	38 kg
S2609A	9	2250	3250	1895	4100	700	43 kg
S2610A	10	2500	3500	2010	4350	700	48 kg
S2611A	11	2750	3750	2125	4600	700	53 kg
S2612A	12	3000	4000	2240	4850	700	58 kg
S2613A	13	3250	4250	2355	5100	700	63 kg

*The platform is included in the number of the steps
Measures are in mm