



To optimize transport the ladder can be supplied disassembled

Decription

The ladder is made of stainless steel and it is equipped with handrail. Platforms and steps are in anti-slip aluminum.

It is available in two versions:

- **S2P/A** (from 6 to 12 steps) four rotating wheels with brake lever.
- **S2P/F** (from 6 to 12 steps) four ground fixing plates

WARNING: with version S2P/A the user must activate the brake pedal before using the ladder.

Steps: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

FRAMES: stainless steel
(40x20, 60x20, 20x20 mm)


PLATFORMS: anti-slip aluminum
700x340 mm

WHEELS: rotating wheels with brake lever Ø 125mm


STEPS: aluminum 150x23 mm

TOP WIDTH: 700 mm

SAFETY STANDARD: D. Lgs. n° 81/2008

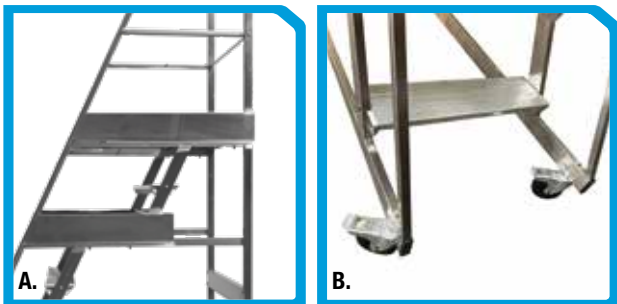

A. Double platform
B. Rotating wheels with brake lever

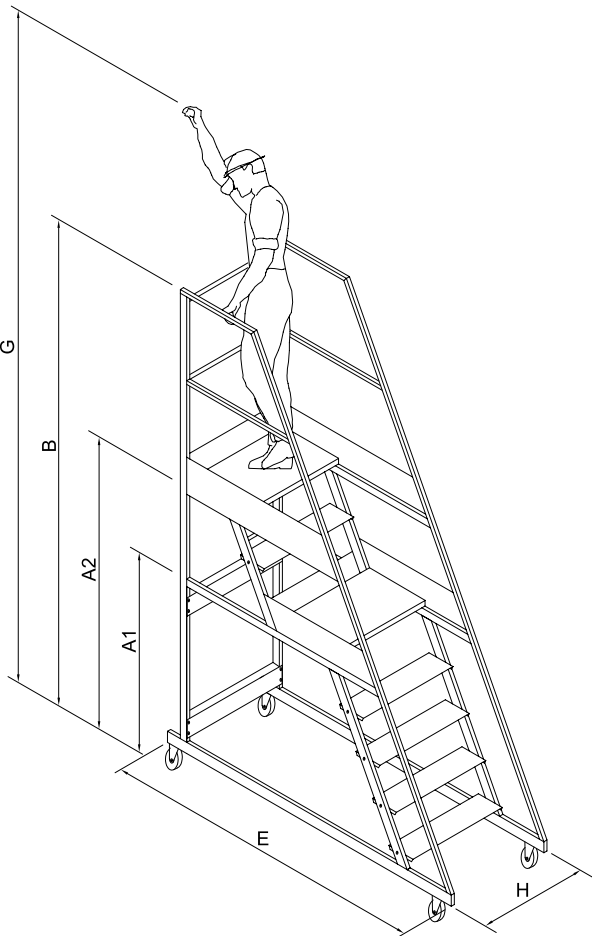

Code	Steps*	A1	A2	B	E	G	H	Weight
S2506A	6	1000	1500	2500	1700	3350	700	35 kg
S2508A	8	1500	2000	3000	1920	3850	700	45 kg
S2510A	10	2000	2500	3500	2140	4350	700	55 kg
S2512A	12	2500	3000	4000	2360	4850	700	65 kg

* The platforms are included in the number of the steps
Measures are in mm