



To optimize transport the ladder can be supplied disassembled

Description

CCBR ladder with platform is made of stainless steel. The platform and the steps are in anti-slip aluminum. The ladder is provided with handrail.

It is available in five versions:

- **CCBR/A** (photo A, from 3 to 13 steps): two rear fixed wheels and two rotating front wheels with spring
- **CCBR/MA** (photo B, from 3 to 13 steps): two rear fixed wheels and two front steel handles (the two rotating wheels and the braking device are not included)
- **CCBR/AA** (photo C, from 3 to 8 steps): two rotating rear wheels with spring and two rotating front wheels with spring
- **CCBR/P** (photo D, from 4 to 13 steps): two rear fixed wheels and a front braking device composed by two rotating wheels and a brake pedal
- **CCBR/F** (photo E, from 3 to 13 steps): two rear fixed wheels and two rotating front wheels with brake lever.

WARNING: in the P and F versions the user must activate the brake pedal before using the ladder.

STEPS: they are mounted on aluminum die-casted supports with rungs and anti-torsion groove and they are fixed onto the frames.

WELD FREE AND RIVETING FREE

Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)

FRAMES: stainless steel
(60x20 mm + 40x20 mm + 30x15 mm)


PLATFORM: anti-slip aluminum
450x340 mm

WHEELS: rear wheels $\varnothing$ 140 mm,
front wheels $\varnothing$ 100 mm

STEPS: aluminum 150x23 mm

TOP WIDTH: 450 mm

SAFETY STANDARD:
D. Lgs. n° 81/2008

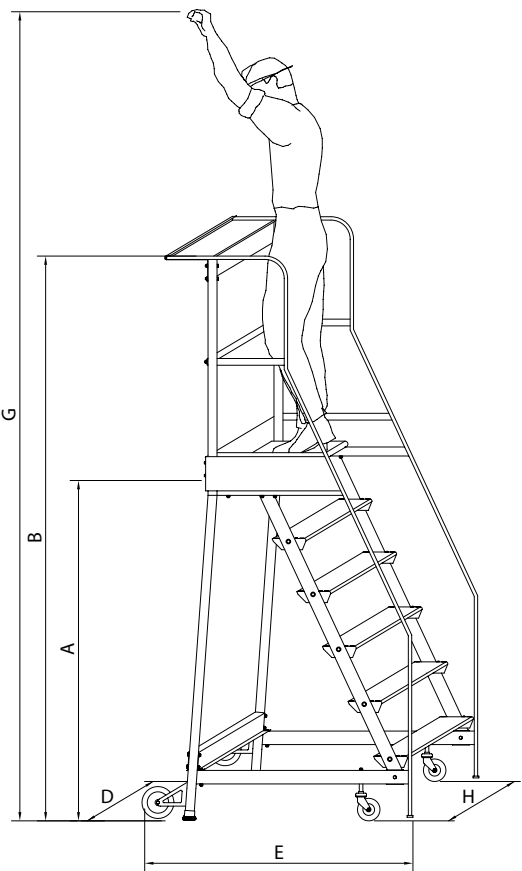


Code	Steps*	A	B	D	E	G	H	Weight	
S0303A	3	750	1750	480	930	2600	460	24 kg	N/A
S0304A	4	1000	2000	580	930	2850	490	26 kg	30 kg**
S0305A	5	1250	2250	620	1100	3100	510	28,4 kg	32,5 kg**
S0306A	6	1500	2500	650	1220	3350	530	31,8 kg	36 kg**
S0307A	7	1750	2750	680	1340	3600	550	35,5 kg	39,5 kg**
S0308A	8	2000	3000	710	1460	3850	570	39 kg	43 kg**
S0309A	9	2250	3250	740	1600	4100	590	45,5 kg	49,6 kg**
S0310A	10	2500	3500	770	1720	4350	610	49,9 kg	54 kg**
S0311A	11	2750	3750	800	1900	4600	630	54,1 kg	58,3 kg**
S0312A	12	3000	4000	830	2040	4850	650	57,7 kg	62 kg**
S0313A	13	3250	4250	860	2200	5100	670	61,9 kg	66,2 kg**



A.



B.



C.

- A. CCBR/A Version
B. CCBR/MA Version
C. CCBR/AA Version



D.



E.

*The platform is included in the number of the steps
** Weight of ladder with braking device
Measures are in mm

- D. CCBR/P Version
E. CCBR/F Version