



To optimize transport the rings can be supplied disassembled


Description

The ladder can be supplied in single or double trunk for both indoor and outdoor use and it offers a total safety for the operator as it is fully protected by a circular structure composed by aluminum rings. It has anodized aluminum frames and anti-slip steps. It is ideal for acces to roofs, terraces, platforms or to carry out inspections to the summit of silos, tanks, pipelines, machinery, etc. It is constructed on request for any height with varius optional available.

STEPS: WELD FREE AND RIVETING FREE


Technical Data

WEIGHT CAPACITY: 150 kg
(weight related to a person with tools)
STEPS: aluminum 35x24 mm
FRAMES: anodized aluminum 65x30 mm
SAFETY STANDARD:
D. Lgs. n° 81/2008
UNI EN ISO 14122-4
UNI 11962

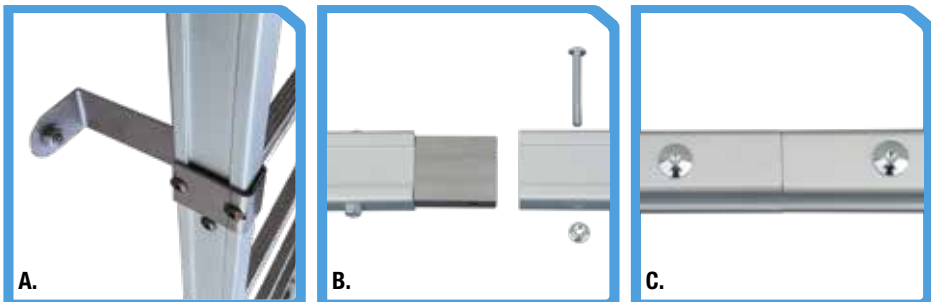


A. 150 mm bracket detail
B. Graft
C. Fixing after grafting

Type of ladder:
UNI EN ISO 14122-4

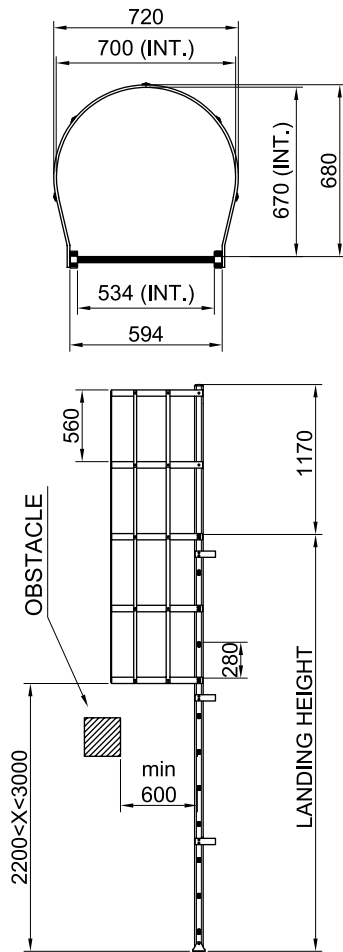

Type of ladder:
UNI 11962 - D.LGS. 81/2008

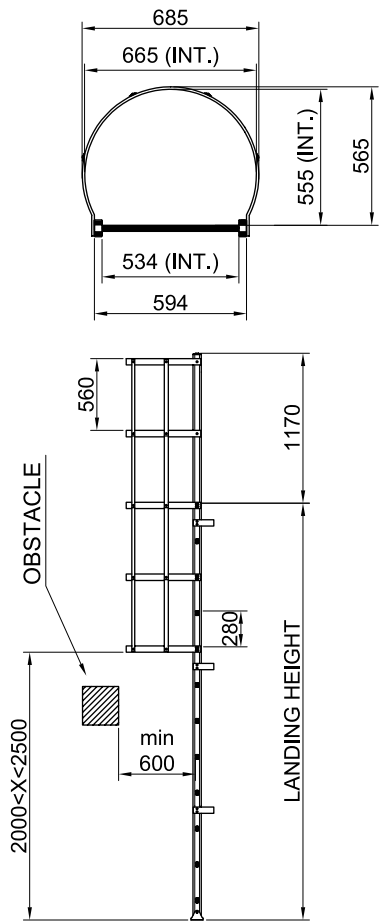

Measures are in mm

Our caged ladders are custom-made to meet every requirement. To configure the model with the various accessories, please contact our **sales office** or write to **info@italscalesrl.it**



D. Bottom element with hooks
E. Closing climb entry
F. Platform